

Orion White 1510lm 3000K Ra>80 Trailing edge

Article code: 212115
EAN: 7021982121159



Electrical

System wattage: 15W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 35, B16: 56, C10: 43, C16: 69

Light technic

Type of light source: LED
Luminous flux: 1510lm
Efficacy: 101 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C-

Materials and finish

Housing: Steel
Colour: White
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 87
Diameter (mm) D: 300
Weight (kg) gross/net: 1.08 / 0.9

Packaging

Packing dimensions (mm): 310 x 310 x 95

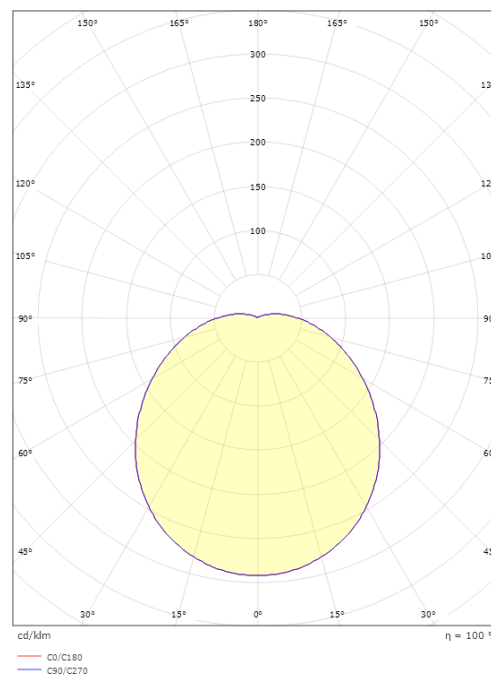

7 0 2 1 9 8 2 1 2 1 1 5 9